



ROSHNI LOW PROFILE



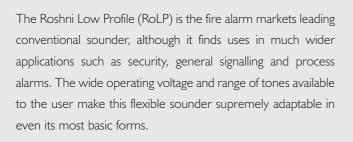

- HIGH SOUND OUTPUT
- LOW CURRENT CONSUMPTION
- 32 TONES (USER SELECTABLE)
- AUTOMATIC SYNCHRONISATION
- VOLUME CONTROL
- SECOND TONE FOR TWO STAGE ALARMS
- LOCKABLE BASE

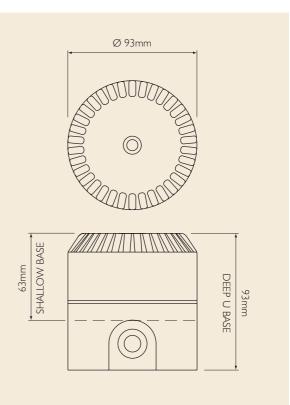

Specification

Voltage	9 - 28Vdc (*1)
Current	16mA (tone 3)
Sound output	102dB(A) (tone 3)
Tones	32
Volume control	20dB
Monitoring	Reverse polarity
Temperature	- 25°C to + 70°C
Protection	IP65
Construction	ABS
Weight	Shallow base 0.24Kg
	Deep & U base 0.25Kg
Colours	Red or white

(*1) 110 to 230Vac with powered base.